

MZ7LM3T8HMLP-00005  
MZ7LM1T9HMJP-00005  
MZ7LM960HMJP-00005  
MZ7LM480MHQ-00005  
MZ7LM240MHQ-00005

# 2.5" SATA 6Gbps PM863a

SAMSUNG Solid State Drive

## datasheet

SAMSUNG ELECTRONICS RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind.

This document and all information discussed herein remain the sole and exclusive property of Samsung Electronics. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or otherwise.

Samsung products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply.

For updates or additional information about Samsung products, contact your nearest Samsung office.

All brand names, trademarks and registered trademarks belong to their respective owners.

© 2016 Samsung Electronics Co., Ltd. All rights reserved.

## Revision History

<u>Revision No.</u>	<u>History</u>	<u>Draft Date</u>	<u>Remark</u>	<u>Editor</u>	<u>Review by</u>
0.1	1. Initial release.	Feb. 22. 2016	Preliminary	H.I. Choi	I.Y. Kim
0.2	1. Updates TBW	Apr. 07. 2016	Preliminary	H.I. Choi	I.Y. Kim
1.0	1. Initial release.	April. 20. 2016	Final	H.I. Choi	I.Y. Kim

## SAMSUNG Solid State Drive PM863a Features

Part Number	Capacity <sup>1)</sup>
MZ7LM3T8HMLP-00005	3,840GB
MZ7LM1T9HMJP-00005	1,920GB
MZ7LM960HMJP-00005	960 GB
MZ7LM480HMHQ-00005	480 GB
MZ7LM240HMHQ-00005	240 GB

## FEATURES

- SATA 6Gbps
- 2.5" 7mmT
- Fully Complies with ATA/ATAPI-7 Standard
- AES 256-bit Encryption Engine
- Support NCQ (up to 32 depth) Command Set
- Support TRIM Command
- RoHS Compliant

PERFORMANCE <sup>2)</sup>

- Data Transfer Rate
  - Sequential Read Up to 520 MB/s<sup>3)</sup>
  - Sequential Write Up to 480 MB/s<sup>3)</sup>
  - Random Read (8KB) Up to 55 KIOPS
  - Random Write (8KB) Up to 12 KIOPS
  - Random Read (4KB) Up to 97 KIOPS
  - Random Write (4KB) Up to 24 KIOPS
- IOPS Consistency (Read/Write @4KB) 99 / 97%
- Latency (Read/Write @4KB, QD=1 Avg.) 130 / 30us
- Quality of Service(99.99%)
  - Read (4KB, QD=1) 0.3 ms
  - Write (4KB, QD=1) 0.2 ms
  - Read (4KB, QD=32) 1.0 ms
  - Write (4KB, QD=32) 3.0 ms

## RELIABILITY

- Non-recoverable Read Error 1 sector per 10<sup>17</sup> bit read
- MTBF 2,000,000 hours
- TBW
 

(240GB)	341TB
(480GB)	683TB
(960GB)	1366TB
(1920GB)	2,733 TB
(3840GB)	5,466 TB

ENVIRONMENTAL SPECIFICATIONS<sup>4)</sup>

- Temperature
  - Operating 0 ~ 70 °C
  - Non-operating -40 ~ 85 °C
- Humidity (non-condensing) 5 ~ 95 %
- Shock (1/2 sine pulse) 1,500 G (0.5ms)
- Vibration (20min /axis on 3 axes)
  - Non-operating (10 ~ 2,000 Hz, Sweep Sine) 20 G

POWER REQUIREMENTS <sup>5) 6)</sup>

- Supply Voltage +5V ± 5%
- Voltage Ripple/Noise (max.) 100mV p-p
- Active (Read) (Typ.) 3 W
- Active (Write) (Typ.)
 

(240/480/960GB)	3 W
(1920/3840GB)	4 W
- Idle (Typ.) 1.3 W

## PHYSICAL DIMENSION

- Width 100.20 ± 0.25 mm
- Depth 69.85 ± 0.25 mm
- Height 6.80 ± 0.20 mm
- Weight Up to 70 g

**NOTE:** Specifications are subject to change without notice.

1) 1MB = 1,000,000 Bytes, 1GB = 1,000,000,000 Bytes, Unformatted Capacity. User accessible capacity may vary depending on operating environment and formatting.

2) Performance measured using FIO 2.1.3 with queue depth 32, C216 Intel SATA 6G port. Measurements are performed on whole LBA range. Write cache enabled. Performance vary depending on capacity

3) 1 MB/sec = 1,048,576 bytes/sec was used in sequential performance.

4) Operating Temperature (0 ~ 70°C / Tc) is measured at the hottest point on the case. Sufficient airflow is recommended to be operated properly on heavier workloads within device operating temperature.

5) Active Read power is measured on 4 KB random read.

Active Write power is measured on 128 KB sequential write.

6) Idle power is measured with DIPM off.

1.0 Introduction .....	5
1.1 General Description .....	5
1.2 Product List .....	5
1.3 Ordering Information .....	5
2.0 Product Specifications .....	6
2.1 Interface and Compliance .....	6
2.2 Drive Capacity .....	6
2.3 Performance .....	6
2.4 Electrical Characteristics .....	7
2.5 Environmental Specifications .....	8
2.6 Reliability .....	8
3.0 Mechanical Specification .....	9
4.0 Electrical Interface Specification .....	10
4.1 Serial ATA Interface Connector .....	10
4.2 Pin Assignments .....	10
5.0 Command Descriptions .....	11
5.1 Supported ATA Commands .....	11
5.2 Individual Attribute Data Structure .....	12
6.0 Identify Device Data .....	14
7.0 SPOR Specification (Sudden Power Off and Recovery) .....	17
7.1 Data Recovery in Sudden Power Off .....	17
7.2 Time to Ready Sequence .....	17
8.0 Product Compliance .....	18
9.0 References .....	19

# 1.0 Introduction

## 1.1 General Description

This document describes the specification of the PM863a SSD which use SATA 6Gb/s interface. PM863a are fully consist of semiconductor device and using NAND Flash Memory which has a high reliability and a high technology for a storage media. As the SSD doesn't have a moving parts such as platter (disk) and head media, it gives a good solution for a storage device with a high performance, high capacity. PM863a delivers 520GB/s for sequential read and 480GB/s for sequential write speed under up to 3.7W power.

## 1.2 Product List

Formfactor	Density	Part Number
2.5" 7mmT	3,840GB	MZ7LM3T8HMLP-00005
	1,920GB	MZ7LM1T9HMJP-00005
	960GB	MZ7LM960HMJP-00005
	480GB	MZ7LM480MHQ-00005
	240GB	MZ7LM240MHQ-00005

## 1.3 Ordering Information

M Z X X X X X X X X X X - X X X X X  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

### 1. Memory (M)

### 2. Module Classification

Z: SSD

### 3. Form Factor

7: 2.5" 7mmT SATA

### 4. Line-Up

L: V-NAND 3bit

### 5. SSD CTRL

M: Mercury

### 6~8. SSD Density

3T8: 3,840 GB

480: 480GB

1T9: 1,920 GB

240: 240GB

960: 960GB

### 9. NAND PKG + NAND Voltage

H: BGA

### 10. Flash Generation

M: 1st Generation

### 11~12. NAND Density

HQ: 1T QDP 4CE

JP: 2T ODP 8CE

LP: 4T HDP 8CE

### 13. " - "

### 14. Default

"0"

### 15. HW revision

0: No revision

### 16. Packing type

0: Bulk

### 17~18. Customer

05: General SED

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

## 2.0 Product Specifications

### 2.1 Interface and Compliance

- SATA 6.0Gbps
- Fully compatible with ATA/ATAPI-7 Standard
- Compatible with ATA/ATAPI-8 ACS3 Mandatory Command
- Native Command Queueing (NCQ) Command Set
- Support Data Set Management Trim Command

### 2.2 Drive Capacity

[Table 1] User Capacity and Addressable Sectors

	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
<b>User-Addressable Sectors</b>	468,862,128	937,703,088	1,875,385,008	3,750,748,848	7,501,476,528
<b>Bytes per Sector</b>	512 Bytes				

**NOTE:**

1. Megabyte (MB) = 1 Million bytes; 1 Gigabyte (GB) = 1 Billion bytes
2. Actual usable capacity may be less (due to formatting, partitioning, operating system, applications or otherwise).

### 2.3 Performance

[Table 2] Sequential Read / Write Performance

<b>Read / Write</b>	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Sequential Read Sector (128 KB)	330MB/s	520MB/s	520MB/s	520MB/s	520MB/s
Sequential Write Sector (128 KB)	300MB/s	480MB/s	480MB/s	480MB/s	480MB/s

[Table 3] Sustained Random Read / Write Performance

<b>Read / Write</b>	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Random Read IOPS (8 KB)	45K	55K	55K	55K	55K
Random Write IOPS (8 KB)	4K	8K	12K	12K	12K
Random Read IOPS (4 KB)	86K	97K	97K	97K	97K
Random Write IOPS (4 KB)	9K	16K	24K	24K	24K

**NOTE:**

- 1) Actual performance may vary depending on use conditions and environment.
- 2) Performance measured using FIO 2.1.3 with queue depth 32, C216 Intel SATA 6G port.
- 3) Measurements are performed on whole LBA range.
- 4) Write cache enabled.
- 5) 1 MB/sec = 1,048,576 bytes/sec was used in sequential performance.

[Table 4] IOPS Consistency

<b>IOPS Consistency</b>	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Random Read (4 KB)	99%	99%	99%	99%	99%
Random Write (4 KB)	96%	97%	97%	97%	97%

**NOTE:**

- 1) IOPS consistency measured using FIO with queue depth 32.
- 2) IOPS Consistency (%) = (99.9% IOPS) / (Average IOPS) x 100.

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

[Table 5] Latency

Latency	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Read (4 KB)	130us	130us	130us	130us	130us
Write (4 KB)	30us	30us	30us	30us	30us

**NOTE:**

1) Latency is measured using FIO with queue depth 1 on 4KB random and write.

[Table 6] Quality of Service (QoS)

Quality of Service (99%)	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Read (4 KB, QD=1)	0.3 ms	0.3 ms	0.3 ms	0.3 ms	0.3 ms
Write (4 KB, QD=1)	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms
Read (4 KB, QD=32)	2.0 ms	1.0 ms	1.0 ms	1.0 ms	1.0 ms
Write (4 KB, QD=32)	4.0 ms	3.0 ms	3.0 ms	3.0 ms	3.0 ms
Quality of Service (99.99 %)	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Read (4 KB, QD=1)	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms
Write (4 KB, QD=1)	0.2 ms	0.2 ms	0.2 ms	0.2 ms	0.2 ms
Read (4 KB, QD=32)	2.0 ms	1.0 ms	1.0 ms	1.0 ms	1.0 ms
Write (4 KB, QD=32)	6.0 ms	3.0 ms	3.0 ms	3.0 ms	3.0 ms

**NOTE:**

1) QoS is measured using Fio 2.1.3 (99 and 99.99%) in Linux RHEL 6.5 (Kernel 2.6.32) with queue depth 1, 32 on 4KB random read and write.  
2) QoS is measured as the maximum round-trip time taken for 99 and 99.99% of commands to host.

## 2.4 Electrical Characteristics

[Table 7] Operating Voltage

Item	Requirements
Allowable voltage	5.0 V $\pm$ 5%
Allowable noise / ripple	100 mV p-p or less

**NOTE:**

1) The measurement value of inrush current is also compatible with the standard specification of "Enterprise SSD Form Factor Version 1.0a"

[Table 8] Power Consumption

Read/Write	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Active Write <sup>1</sup> (Typ.)	3 W	3 W	3 W	4 W	4 W
Active Read <sup>2</sup> (Typ.)	3 W	3 W	3 W	3 W	3 W
Idle <sup>3</sup>	1.3 W	1.3 W	1.3 W	1.3 W	1.3 W

**NOTE:**

1) Active Write power is measured on 128 KB sequential write.  
2) Active Read power is measured on 4 KB random read.  
3) Idle power is measured with DIPM off.

[Table 9] Inrush Current

Parameter	Requirements
Inrush Current	1.2A, <1sec

**NOTE:**

1) The measurement value of inrush current is also compatible with the standard specification of "Enterprise SSD Form Factor Version 1.0a" released by SSD Form Factor Working Group.

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

## 2.5 Environmental Specifications

[Table 10] Environmental Specifications

Features	Operating	Non-Operating
Temperature <sup>1</sup>	0 °C to 70 °C	-40 °C to 85 °C
Temperature Gradient	30 °C /Hr	30 °C /Hr
Humidity	5 % to 95 %, non-condensing	
Shock	1500 G, duration 0.5 ms, Half Sine Wave	
Vibration	20G, 10 ~ 2,000 Hz, Sinusoidal 2.17Grms, 7~800Hz, Random	

**NOTE:**

1) Operating Temperature (0 ~ 70°C / Tc) is measured at the hottest point on the case. Sufficient airflow is recommended to be operated properly on heavier workloads within device operating temperature.

## 2.6 Reliability

[Table 11] MTBF Specifications

Parameter	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
MTBF	2,000,000 Hours				

**NOTE:**

1) MTBF is Mean Time Between Failure. As same word, annual failure ratio is 0.438%.

[Table 12] UBER Specifications

Parameter	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
UBER	1 sector per 10 <sup>17</sup> bits read				

**NOTE:**

1) Uncorrectable Bit Error Rate (UBER) is a metric for the rate of occurrence of data errors, equal to the number of data errors per bits read as specified in the JESD218 document of JEDEC standard. For the enterprise application, JEDEC recommends that UBER shall be below 10<sup>-16</sup>.

[Table 13] TBW (TeraBytes Written) Specifications

Parameter	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
TBW	341 TB	683 TB	1366 TB	2733 TB	5466 TB

**NOTE:**

1) TBW is measured while running 100 % random 4 KB writes across the entire SSD. (TBW = DWPD x 365 x 3 x User capacity).

[Table 14] Drive Write Per Day (DWPD) Specifications

Parameter	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
DWPD	1.3 (3Years)				

[Table 15] Data Retention Specifications

Parameter	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Data Retention	3months				

**NOTE:**

1) Data retention was measured by assuming that SSD reaches the maximum rated endurance at 40°C in power-off state.

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**



# 3.0 Mechanical Specification

[Table 16] Physical Dimensions and Weight

Model	Height (mm)	Width (mm)	Length (mm)	Weight (gram)
120 / 240 / 480 / 960 / 1,920 / 3,840GB	6.80 ± 0.20	69.85 ± 0.25	100.20 ± 0.25	Max 70g

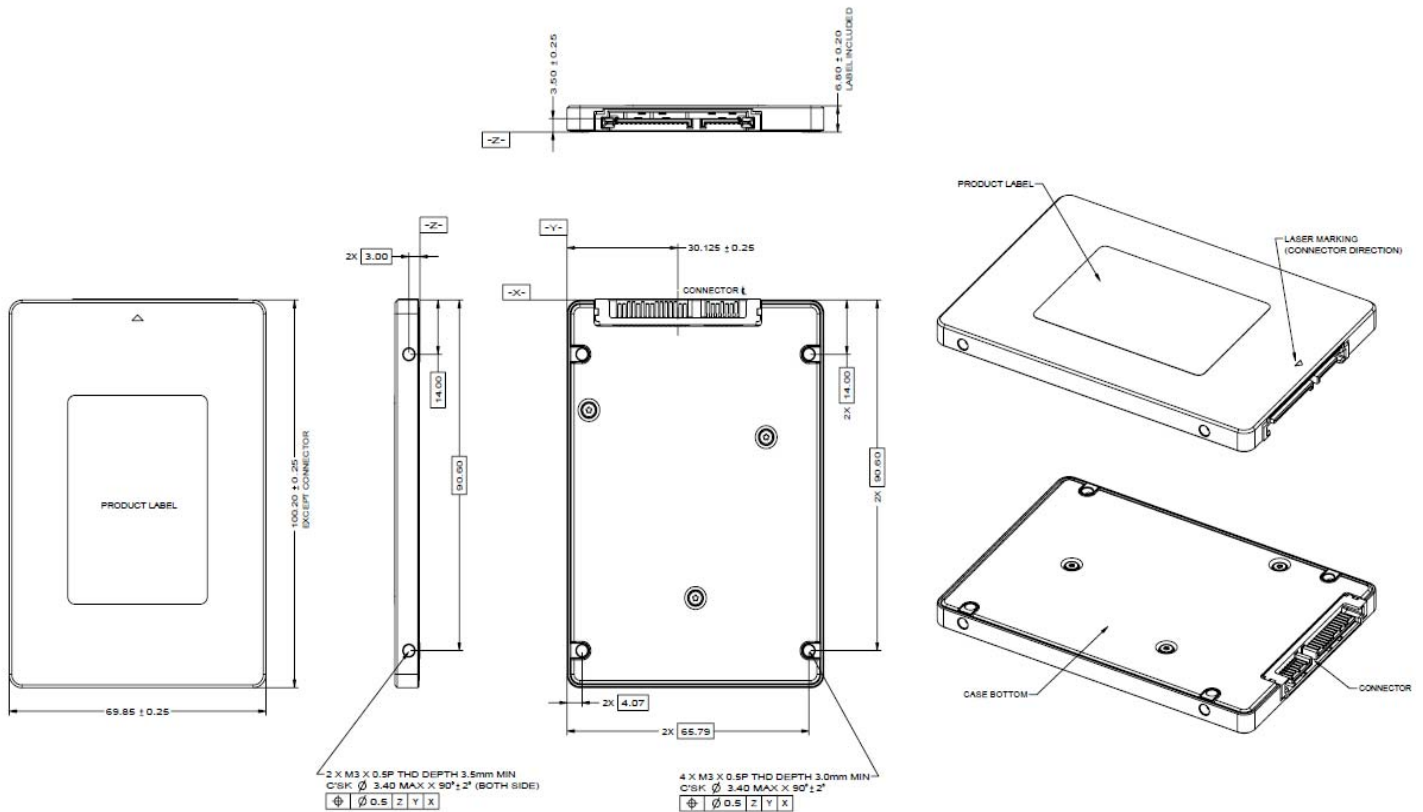


Figure 1. Physical Dimension

IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.

## 4.0 Electrical Interface Specification

### 4.1 Serial ATA Interface Connector

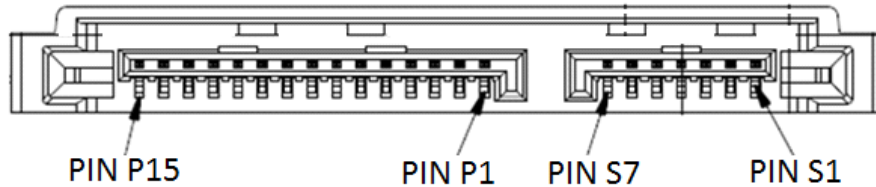


Figure 2. Drive Plug Connector

### 4.2 Pin Assignments

[Table 17] Pin Assignments

Word	No.	Plug Connector pin definition		
Signal	S1	GND	2 <sup>nd</sup> mate	
	S2	A +	Differential signal A from Phy	
	S3	A -		
	S4	GND	2 <sup>nd</sup> mate	
	S5	B -	Differential signal B from Phy	
	S6	B +		
	S7	GND	2 <sup>nd</sup> mate	
Key and spacing separate signal and power segments				
Power	P1	V33	3.3 V power (Unused)	
	P2	V33	3.3 V power (Unused)	
	P3	V33	3.3 V power, pre-charge, 2 <sup>nd</sup> mate (Unused)	
	P4	GND	1 <sup>st</sup> mate	
	P5	GND	2 <sup>nd</sup> mate	
	P6	GND	2 <sup>nd</sup> mate	
	P7	V5	5 V power, pre-charge, 2 <sup>nd</sup> mate	
	P8	V5	5 V power	
	P9	V5	5 V power	
	P10	GND	2 <sup>nd</sup> mate	
	P11	DAS / DSS	Device Activity Signal / Disable Staggered Spin-up	
	P12	GND	1 <sup>st</sup> mate	
	P13	V12	12 V power, pre-charge, 2 <sup>nd</sup> mate (Unused)	
	P14	V12	12 V power (Unused)	
	P15	V12	12 V power (Unused)	

**NOTE:**

1. Uses 5 V power only. 3.3 V and 12 V power are not used

## 5.0 Command Descriptions

### 5.1 Supported ATA Commands

[Table 18] Supported ATA Commands Summary

Command Name	Command Code (Hex)	Command Name	Command Code (Hex)
CHECK POWER MODE	E5h / 98h	SEND FPDMA QUEUED	64h
DEVICE CONFIGURATION	B1h	SET DATE N TIME	77h
DOWNLOAD MICROCODE	92h	SET FEATURES	EFh
DOWNLOAD MICROCODE DMA	93h	SET MAX ADDRESS	F9h
EXECUTE DEVICE DIAGNOSTIC	90h	SET MAX ADDRESS EXT	37h
FLUSH CACHE	E7h	SET MULTIPLE MODE	C6h
FLUSH CACHE EXT	EAh	SLEEP	E6h / 99h
IDENTIFY DEVICE	ECh	S.M.A.R.T.	B0h
IDLE	E3h / 97h	STANDBY	E2h / 96h
IDLE IMMEDIATE	E1h / 95h	STANDBY IMMEDIATE	E0h / 94h
INITIALIZE DEVICE PARMETERS	91h	TRIM	06h
NOP	00h	WRITE BUFFER	E8h
READ BUFFER	E4h	WRITE BUFFER DMA	EBh
READ BUFFER DMA	E9h	WRITE DMA	CAh
READ DMA	C8h	WRITE DMA (w/o retry)	CBh
READ DMA (w/o retry)	C9h	WRITE DMA EXT	35h
READ DMA EXT	25h	WRITE DMA FUA EXT	3Dh
READ FPDMA QUEUED	60h	WRITE FPDMA QUEUED	61h
READ LOG DMA EXT	47h	WRITE LOG DMA EXT	57h
READ LOG EXT	2Fh	WRITE LOG EXT	3Fh
READ MULTIPLE	C4h	WRITE MULTIPLE	C5h
READ MULTIPLE EXT	29h	WRITE MULTIPLE EXT	39h
READ NATIVE MAX ADDRESS	27h	WRITE MULTIPLE FUA EXT	CEh
READ NATIVE MAX ADDRESS EXT	F8h	WRITE SECTORS	30h
READ SECTORS	20h	WRITE SECTORS (w/o retry)	31h
READ SECTORS (w/o retry)	21h	WRITE SECTORS EXT	34h
READ SECTORS EXT	24h	WRITE UNCORRECTABLE EXT	45h
READ VERIFY SECTORS	40h		
READ VERIFY SECTORS (w/o retry)	41h		
READ VERIFY SECTORS EXT	42h		
RECALIBRATE	10h		
RECEIVE FPDMA QUEUED	65h		
SANITIZE DEVICE	B4h		
SECURITY DISABLE PASSWORD	F6h		
SECURITY ERASE PREPARE	F3h		
SECURITY ERASE UNIT	F4h		
SECURITY FREEZE LOCK	F5h		
SECURITY SET PASSWORD	F1h		
SECURITY UNLOCK	F2h		
SEEK	70h		

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

## 5.2 Individual Attribute Data Structure

The following defines the 12 bytes that make up the information for each Attribute entry in the Device Attribute Data Structure.

[Table 19] Attribute Entry in Device Attribute Data Structure

Byte	Descriptions
0	Attribute ID number 01-FFh
1 - 2	Status flag bit 0 (pre-failure / advisory bit) bit 0 = 0: If attribute value is less than the threshold, the drive is in advisory condition. Product life period may expired. bit 0 = 1: If attribute value is less than the threshold, the drive is in pre-failure condition. The drive may have failure. bit 1 (on-line data collection bit) bit 1 = 0: Attribute value will be changed during off-line data collection operation. bit 1 = 1: Attribute value will be changed during normal operation. bit 2 (Performance Attribute bit) bit 3 (Error rate Attribute bit) bit 4 (Event Count Attribute bit) bit 5 (Self-Preserving Attribute bit) bit 6 - 15 Reserved
3	Attribute value 01h - FDh *1 00h, FEh, FFh = Not in use 01h = Minimum value 64h = Initial value FDh = Maximum value
4	Worst Ever normalized Attribute Value (valid values from 01h - FEh)
5 - 10	Raw Attribute Value Attribute specific raw data (FFFFFFh - reserved as saturated value)
11	Reserved (00h)

\*1 For ID = 199 CRC Error Count

The device supports following Attribute ID Numbers.

[Table 20] SMART Attributes

ID (Word)	Attribute Name	Status Flag	Threshold (%)
5	Reallocated Sector Count	110011	10
9	Power-on Hours	110010	-
12	Power-on Count	110010	-
177	Wear Leveling Count	010011	5
179	Used Reserved Block Count (total)	010011	10
180	Unused Reserved Block Count (total)	010011	10
181	Program Fail Count (total)	110010	-
182	Erase Fail Count (total)	110010	-
183	Runtime Bad Count (total)	010011	10
184	End to End Error data path Error Count	110011	97
187	Uncorrectable Error Count	110010	-
190	Air Flow Temperature	110010	-
194	Temperature	100010	-
195	ECC Error Rate	011010	-
197	Pending Sector Count	110010	-
199	CRC Error Count	111110	-
202	SSD Mode Status	110011	10
235	Power Recovery Count	010010	-
241	Total LBA Written	110010	-
242	Total LBA Read	110010	-
243	SATA Downshift Control	110010	-
244	Thermal Throttle Status	110010	-
245	Timed Workload Media Wear	110010	-
246	Timed Workload Host Read / Write Ratio	110010	-
247	Timed Workload Timer	110010	-
251	NAND Writes	110010	-
252	Read ECC Count	110010	-

NOTE:

1. Any nonzero value in the Attribute ID Number indicates an active attribute.

## 6.0 Identify Device Data

[Table 21] Identify Device Data

Word	120 GB	240 GB	480 GB	1,920 GB	3,840 GB	General Information
0	0040h	0040h	0040h	0040h	0040h	Obsolete
1	3FFFh	3FFFh	3FFFh	3FFFh	3FFFh	Obsolete
2	C837h	C837h	C837h	C837h	C837h	Obsolete
3	0010h	0010h	0010h	0010h	0010h	Retired
4 - 5	0000h	0000h	0000h	0000h	0000h	Obsolete
6	003Fh	003Fh	003Fh	003Fh	003Fh	Obsolete
7 - 8	0000h	0000h	0000h	0000h	0000h	Reserved for the Compact Flash Association
9	0000h	0000h	0000h	0000h	0000h	Retired
10 - 19	XXXXh	XXXXh	XXXXh	XXXXh	XXXXh	Serial Number (ATA string)
20-21	0000h	0000h	0000h	0000h	0000h	Obsolete
22	0000h	0000h	0000h	0000h	0000h	Obsolete
23-26	XXXXh	XXXXh	XXXXh	XXXXh	XXXXh	Firmware Revision (ATA string)
27-46	XXXXh	XXXXh	XXXXh	XXXXh	XXXXh	Model Number
47	8010h	8010h	8010h	8010h	8010h	Read / Write Multiple Support
48	4000h	4000h	4000h	4000h	4000h	Trusted Computing Feature Set Options
49	2F00h	2F00h	2F00h	2F00h	2F00h	Capabilities
50	4000h	4000h	4000h	4000h	4000h	Capabilities
51-52	0200h	0200h	0200h	0200h	0200h	Obsolete
53	0007h	0007h	0007h	0007h	0007h	Obsolete
54	3FFFh	3FFFh	3FFFh	3FFFh	3FFFh	Obsolete
55	0010h	0010h	0010h	0010h	0010h	Obsolete
56	003Fh	003Fh	003Fh	003Fh	003Fh	Obsolete
57	FC10h	FC10h	FC10h	FC10h	FC10h	Obsolete
58	00FBh	00FBh	00FBh	00FBh	00FBh	Obsolete
59	BD10h	BD10h	BD10h	BD10h	BD10h	Multiple Logical Setting
60	FFFFh	FFFFh	FFFFh	FFFFh	FFFFh	Obsolete
61	0FFFh	0FFFh	0FFFh	0FFFh	0FFFh	Obsolete
62	0000h	0000h	0000h	0000h	0000h	Obsolete
63	0007h	0007h	0007h	0007h	0007h	Multi-word DMA Transfer
64	0003h	0003h	0003h	0003h	0003h	PIO Transfer Modes Supported
65	0078h	0078h	0078h	0078h	0078h	Minimum Multiword DMA Transfer Cycle Time per Word (ns)
66	0078h	0078h	0078h	0078h	0078h	Manufacturer's Recommended Multiword DMA Cycle Time (ns)
67	0078h	0078h	0078h	0078h	0078h	Minimum PIO Transfer Cycle Time without IORDY Flow Control (ns)
68	0078h	0078h	0078h	0078h	0078h	Minimum PIO Transfer Cycle Time with IORDY Flow Control (ns)
69	4F30h	4F30h	4F30h	4F30h	4F30h	Additional Supported
70-74	0000h	0000h	0000h	0000h	0000h	Reserved
75	001Fh	001Fh	001Fh	001Fh	001Fh	Queue Dept
76	850Eh	850Eh	850Eh	850Eh	850Eh	Serial ATA Capabilities
77	0046h	0046h	0046h	0046h	0046h	Serial ATA Additional Capabilities
78	0064h	0064h	0064h	0064h	0064h	Serial ATA Features Supported
79	0060h	0060h	0060h	0060h	0060h	Serial ATA Features Enabled
80	03FCh	03FCh	03FCh	03FCh	03FCh	Major Version Number
81	0039h	0039h	0039h	0039h	0039h	Minor Version Number

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

82	746Bh	746Bh	746Bh	746Bh	746Bh	Commands and Feature Sets Supported
83	7D29h	7D29h	7D29h	7D29h	7D29h	Commands and Feature Sets Supported
84	4163h	4163h	4163h	4163h	4163h	Commands and Feature Sets Supported or Enabled
85	7469h	7469h	7469h	7469h	7469h	Commands and Feature Sets Supported or Enabled
86	BC01h	BC01h	BC01h	BC01h	BC01h	Commands and Feature Sets Supported or Enabled
87	4163h	4163h	4163h	4163h	4163h	Commands and Feature Sets Supported or Enabled
88	407Fh	407Fh	407Fh	407Fh	407Fh	Ultra DMA Modes
89	0010h	0010h	0010h	0010h	0010h	Normal Security Erase Unit Time
90	0010h	0010h	0010h	0010h	0010h	Enhanced Security Erase Unit Time
91	00FEh	00FEh	00FEh	00FEh	00FEh	Advanced Power Management Level
92	FFFEh	FFFEh	FFFEh	FFFEh	FFFEh	Master Password Revision Code
93	0000h	0000h	0000h	0000h	0000h	Hardware Reset Result
94	0000h	0000h	0000h	0000h	0000h	Obsolete
95	0000h	0000h	0000h	0000h	0000h	Stream Minimum Request Size
96	0000h	0000h	0000h	0000h	0000h	Streaming Transfer Time - DMA
97	0000h	0000h	0000h	0000h	0000h	Streaming Access Latency - DMA and PIO
98-99	0000h	0000h	0000h	0000h	0000h	Streaming Performance Granularity (DWord)
100-103	XXXXh	XXXXh	XXXXh	XXXXh	XXXXh	Total Number of User 48-Bit LBA
104	0000h	0000h	0000h	0000h	0000h	Streaming Transfer Time - PIO
105	0008h	0008h	0008h	0008h	0008h	Maximum Number of 512-byte Data Blocks of LBA Range Entries per DATA SET MANAGEMENT Command
106	4000h	4000h	4000h	4000h	4000h	Physical Sector Size / Logical Sector Size
107	0000h	0000h	0000h	0000h	0000h	Inter-seek Delay for ISO 7779 Standard Acoustic Testing
108	5002h	5002h	5002h	5002h	5002h	World Wide Name
109	538Ch	538Ch	538Ch	538Ch	538Ch	World Wide Name
110-111	XXXXh	XXXXh	XXXXh	XXXXh	XXXXh	World Wide Name
112-115	0000h	0000h	0000h	0000h	0000h	Reserved
116	0000h	0000h	0000h	0000h	0000h	Reserved for TLC
117-118	0000h	0000h	0000h	0000h	0000h	Logical Sector Size (Dword)
119	409Eh	409Eh	409Eh	409Eh	409Eh	Commands and Feature Sets Supported
120	401Ch	401Ch	401Ch	401Ch	401Ch	Commands and Feature Sets Supported or Enabled
121-126	0000h	0000h	0000h	0000h	0000h	Reserved for Expanded Supported and Enabled Settings
127	0000h	0000h	0000h	0000h	0000h	Obsolete
128	0021h	0021h	0021h	0021h	0021h	Security Status
129-159	0000h	0000h	0000h	0000h	0000h	Vendor Specific
160	0000h	0000h	0000h	0000h	0000h	CFA Power Mode
161-167	0000h	0000h	0000h	0000h	0000h	Reserved for the Compact Flash Association
168	0003h	0003h	0003h	0003h	0003h	Device Nominal Form Factor
169	0001h	0001h	0001h	0001h	0001h	DATA SET MANAGEMENT is Supported
170-173	2020h	2020h	2020h	2020h	2020h	Additional Product Identifier (ATA string)
174-175	0000h	0000h	0000h	0000h	0000h	Reserved
176-205	0000h	0000h	0000h	0000h	0000h	Current Media Serial Number
206	003Dh	003Dh	003Dh	003Dh	003Dh	SCT Command Transport
207-208	0000h	0000h	0000h	0000h	0000h	Reserved for CE-ATA
209	4000h	4000h	4000h	4000h	4000h	Alignment of Logical Blocks within a Physical Block
210-211	0000h	0000h	0000h	0000h	0000h	Write-Read-Verify Sector Count Mode 3
212-213	0000h	0000h	0000h	0000h	0000h	Write-Read-Verify Sector Count Mode 2

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

214	0000h	0000h	0000h	0000h	0000h	Obsolete
215-216	0000h	0000h	0000h	0000h	0000h	Obsolete
217	0001h	0001h	0001h	0001h	0001h	Nominal Media Rotation Rate
218	0000h	0000h	0000h	0000h	0000h	Reserved
219	0000h	0000h	0000h	0000h	0000h	Obsolete
220	0000h	0000h	0000h	0000h	0000h	Write Read Verify Mode
221	0000h	0000h	0000h	0000h	0000h	Reserved
222	107Fh	107Fh	107Fh	107Fh	107Fh	Transport Major Version Number
223	0000h	0000h	0000h	0000h	0000h	Transport Minor Version Number
224-229	0000h	0000h	0000h	0000h	0000h	Reserved
230-233	0000h	0000h	0000h	0000h	0000h	Extended Number of User Addressable Sectors
234	0000h	0000h	0000h	0000h	0000h	Minimum Number of 512-byte Data Blocks per DOWNLOAD MICROCODE Command for Mode 03h
235	0800h	0800h	0800h	0800h	0800h	Maximum Number of 512-byte Data Blocks per DOWNLOAD MICROCODE Command for Mode 03h
236-242	0000h	0000h	0000h	0000h	0000h	Reserved
243	0000h	0000h	0000h	0000h	0000h	FDE Security Features
244-254	0000h	0000h	0000h	0000h	0000h	Reserved
255	XXA5h	XXA5h	XXA5h	XXA5h	XXA5h	Integrity Word



## 7.0 SPOR Specification (Sudden Power Off and Recovery)

### 7.1 Data Recovery in Sudden Power Off

If power interruption is detected, SSD dumps all cached user data and meta data to NAND Flash. SSD could protect even the user data in DRAM from sudden power off while SSD is used with cache on. Commonly, data is protected all of the operation period.

### 7.2 Time to Ready Sequence

In normal power-off recovery status, SSD needs less than 10 seconds to reach operating mode where SSD works perfectly with cache-on state. SSD is ready to respond Identify Device command during FTL OPEN. When the sudden power-off occurs, the user data in DRAM will be dumped into to NAND Flash using the stored power in the capacitor. In sudden power-off recovery condition, mapping data will be loaded or the FTL meta data be rebuilt perfectly for initial max. 10 seconds. During this period, Identify Device command is still supported. It is called SPOR (Sudden Power Off and Recovery).

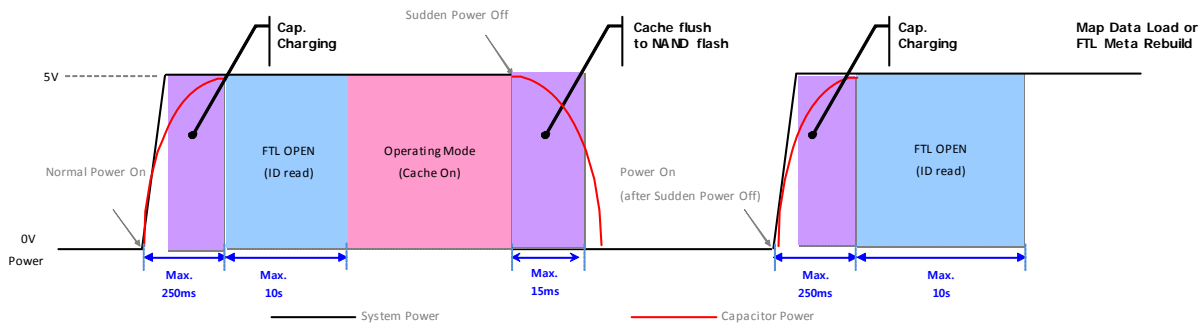


Figure 3. Time to Ready Sequence

[Table 22] Device Ready Time for Normal Read / Write Operation after Sudden Power Off

	240 GB	480 GB	960 GB	1,920 GB	3,840 GB
Max. Open Time (sec)	10	10	10	10	10

## 8.0 Product Compliance

[Table 23] Certifications and Declarations

Category	Certification
Safety	c-UL-us
	CE
	TUV
	CB
EMC	CE (EU)
	BSMI (Taiwan)
	KCC (South Korea)
	VCCI (Japan)
	RCM (Australia)
	FCC (USA)
	IC (Canada)

\* The three existing compliance marks (C-Tick, A-Tick and RCM) are consolidated into a single compliance mark - the RCM



Caution: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
  - Increase the separation between the equipment and receiver.
  - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
  - Consult the dealer or an experienced radio / TV technician for help.
- Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment under FCC rules.



### Industry Canada ICES-003 Compliance Label:

CAN ICES-3 (B)/NMB-3(B)

**IF THERE IS ANY OTHER OPERATION TO IMPLEMENT IN ADDITION TO SPECIFICATION IN THE DATASHEET OR JEDEC STANDARD, PLEASE CONTACT EACH BRANCH OFFICE OR HEADQUARTERS OF SAMSUNG ELECTRONICS.**

## 9.0 References

[Table 24] Standards References

Item	Website
Serial ATA Revision 3.2	<a href="http://www.sata-io.org">http://www.sata-io.org</a>
ATA/ATAPI Command Set - 3 (ACS-2)	<a href="http://www.t13.org">http://www.t13.org</a>
SFF-8223, 2.5-inch Drive with Serial Attachment Connector	<a href="http://www.sffcommittee.org">http://www.sffcommittee.org</a>
SFF-8201, 2.5-inch drive form factor	<a href="http://www.sffcommittee.org">http://www.sffcommittee.org</a>
Solid-State Drive Requirements and Endurance Test Method (JESD218A)	<a href="http://www.jedec.org/standards-documents/docs/jesd218a">http://www.jedec.org/standards-documents/docs/jesd218a</a>
Solid-State Drive Requirements and Endurance Test Method (JESD219A)	<a href="http://www.jedec.org/standards-documents/docs/jesd219a">http://www.jedec.org/standards-documents/docs/jesd219a</a>